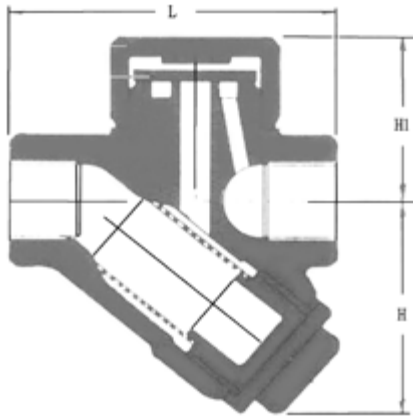


MODEL: UN-317 (ANSI 4.5 - 600LBS, DIN PN 0.3- 40)

Material

Body	CF8M 316	1.4408	SCS 14
Cap	CF8M 316	1.4408	SCS 14
End Cap	CF8M 316	1.4408	SCS 14
Seat	CF8M 316	1.4408	SCS 14
Disc	AISI 420	1.4034	SUS 420
Screen	AISI 304	1.4301	SCS 13
Gasket	RED BRONZE (JIS C1100)		

Specification

- Working Pressure** : ANSI 4.5~600LBS. DIN PN 0.3~40. JIS 0.3~ 40KG/CM²
- Test Pressure** : Body: 1200 PSI. PN80. 80 KG/CM² (cold hydrostatic)
- Working Temperature** : Max allowable 250°C / 482°F Body: Max 400°C / 752°F
- Thread end** : BS21, ANSI B2.1 or DIN 259.
- Special order** : For size 3/8" and Socket Weld end Acc. to ANSI B16.1
- Max. back pressure should not exceed 80% of inlet pressure.

Dimension mm

	L	H	H ₁
3/8"	76.9	53.4	38.9
1/2"	76.9	53.4	38.9
3/4"	87.4	56.6	41.2
1"	92.5	61.6	44.0

Capacity
kg/h

Pressure Size	0.3	1	2	3	5	8	10	20	30	40
3/8"	130	150	170	190	220	320	390	560	660	750
1/2"	160	180	200	240	300	380	420	600	760	900
3/4"	260	240	300	360	430	550	600	900	1100	1300
1"	320	380	480	530	680	800	900	1300	1650	1800



ISO 9001


Agent:
UNI WU GROUP