
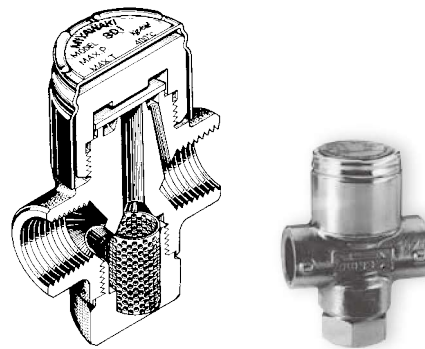
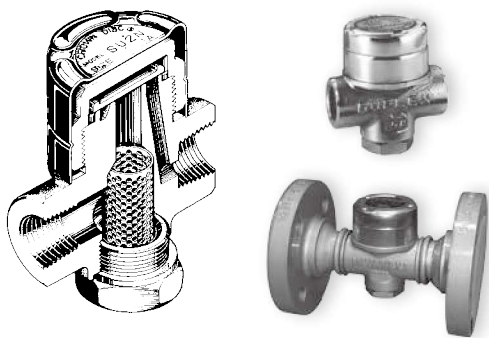
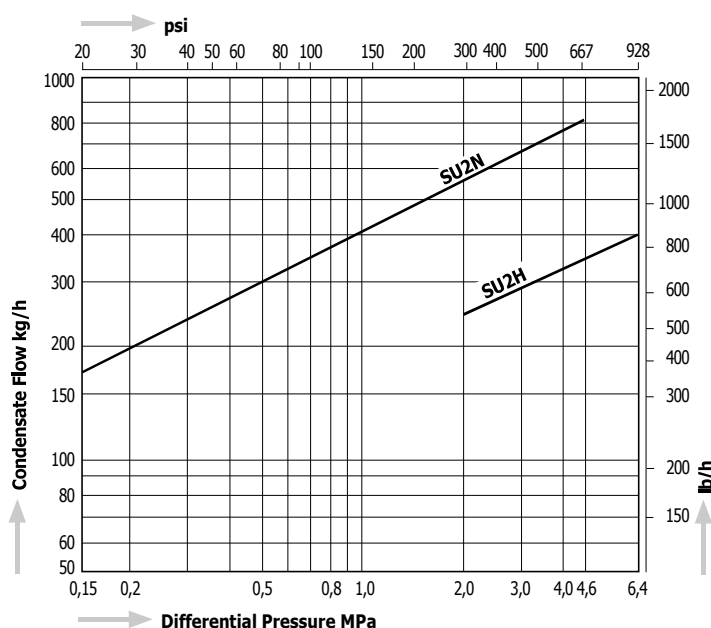
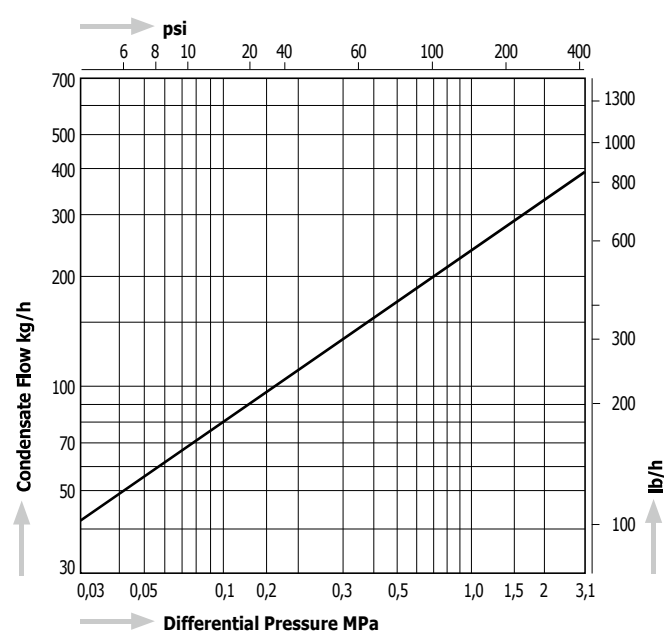





SU2N, SU2H

SD1



Special face-to-face dimensions available.

Capacity Chart SU2N, SU2H**Capacity Chart SD1****Dimensions SU2N, SU2H****SU2NW, SU2HW****SU2NF, SU2HF****SD1**

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight	
			MPa	psig	°C	°F	L	H ₁	H ₂	W	L	H ₁	H ₂	W		kg	lb
SU2N (SU2H)	Screwed Rc, NPT	1/2"	4,6 (6,4)	667 (928)	425	800	70	47	32	53	2.8	1.9	1.3	2.1	Stainless Steel SUS420J2	0,8	1.8
		3/4"					75	51			3.0	2.0				0,9	2.0
		1"														1,4	3.1
SU2NW (SU2HW)	Socket Weld JIS, ASME, DIN	1/2"					140	47	32	53	5.5	1.9	1.3	2.1		1,3	2.9
		3/4"														1,2	2.6
		1"														2,7	5.9
SU2NF (SU2HF)	Flanged JIS, ASME	1/2"					205	47	32	53	8.1	1.9	1.3	2.1	Stainless Steel SUS420J2	3,7	8.1
		3/4"														4,3	9.5
		1"														2,6	5.7
	Flanged DIN PN40	DN15					150	47	32	53	5.9	1.9	1.3	2.1		3,3	7.3
		DN20									6.3					3,8	8.4
		DN25					160										
SD1	Screwed Rc, NPT	1/4"	3,1	450	400	752	52	39	25	34	2.0	1.5	1.0	1.3	Stainless Steel SUS420J2	0,3	0.7
		3/8"															
		1/2"					60	41	23		2.4	1.6	0.9				