





General dimension [mm]

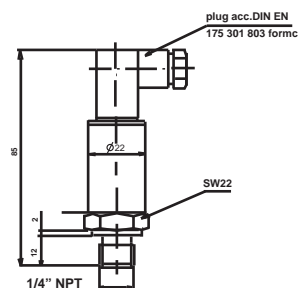

Electrical Wiring

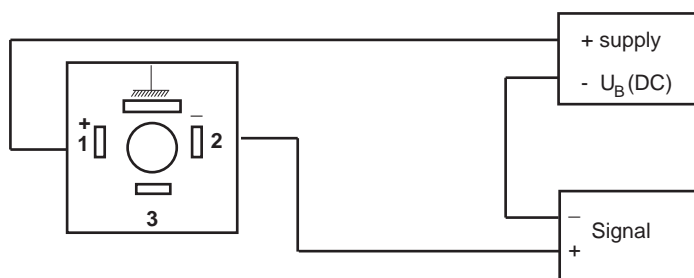

Model	Output signal	Accuracy	Range	Engineering unit	Protection	Process connection	Electrical connection	Options
PT.2000	(42) 4/20 mA (2-wires)	(020) 0,25 %	-1/ 0 -1/ 5 -1/ 25 0/ 0.6 0/ 1 0/ 1,6 0/ 2 0/ 4 0/ 6 0/ 10 0/ 16 0/ 20 0/ 25 0/ 40 0/ 60 0/ 100 0/ 160 0/ 250 0/ 400 0/ 500 0/ 600 0/ 1000 0/ 1600	BAR	(=) IP65 (op) IP68	(M02) ¼ NPT male 2) (MG9) G ¼ B form E male 1)	(HM) Angle connector according to DIN EN 175301-803	(TW) Tagging wired (RC) Round connector M12 (CC) Cable connection Specify cable length in [m]
	others on request		others on request	psi & others on request		others on request	others on request	

How to order

Model	Output signal	Accuracy	Range /Engineering unit	Protection	Process Connection	Electrical Connection	Option
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>